



MULTIFUNCTION  
ANALYZER



CONSUMPTION



RS-485

### MULTIFUNCTION ANALYZER

- The **iKron-01 D** is an instrument conceived to measure electrical parameters in single-phase AC systems, such as energy consumption, current, voltage and others.
- Measurement readings can be obtained locally (through a LCD display) or remotely, using a RS-485 output for communication.
- With a very compact design and suited to Din rail fastening, iKron-01 D allows direct measuring of loads up to 100Aac.

### APPLICATIONS

- Submetering
- Electrical parameters checking
- Analog instruments substitution in low cost submetering systems

### PRODUCT INFO

#### ELECTRICAL PARAMETERS – 15

- Includes True RMS measurements of current, voltage, frequency, active and reactive energies, energy demands, active, reactive and apparent powers, power factor and other parameters

#### INSTALLATION

- Very practical installing
- Panel's Background, 35 mm DIN Rail Fastening
- Technical support via e-mail, telephone, WhatsApp and YouTube videos

#### DIRECT MEASUREMENT – 100 A


- Direct measurement of currents up to 100Aac, without requiring external current transformers

#### INTERFACES, READINGS & CONFIGURATIONS


- Man Machine Interface (MMI) composed of an LCD display and a navigation key, allowing easy local reading and configuration checking
- Software for reading and parameterization: RedeMB (RS-485 communication)
- Modbus-RTU protocol, allowing integration to PLCs, master MMIs, supervisory systems and data concentrators

<b>ELECTRICAL GREATNESSES</b>	<i>Instantaneous</i>	Voltage, Current, Frequency, Active, Reactive and Apparent Power, Power Factor
	<i>Energies</i>	± Active Energy kWh (Consumption and Supply) ± Reactive Energy kVarh [Inductive(+) and Capacitive (-) Loads] Active and Apparent Demand (Last and Maximum)
<b>MEASUREMENTS AND INPUT INFO</b>	<i>Connection Diagram</i>	Single-phase
	<i>Voltage – Working Range</i>	220Vac – 90 to 110% of the nominal value
	<i>Current – Working Range</i>	100mA to 100Aac (1.25Vmax overload)
	<i>Frequency – Working Range</i>	50/60Hz
	<i>Connection</i>	Terminal Blocks (IP-20)
	<i>Maximum Cable to be Used</i>	25mm <sup>2</sup>
	<i>Internal Consumption</i>	<0.5VA
<b>ACCURACY at 25°C (77 °F), referred to the full scale</b>	<i>Voltage, Current, Frequency, Powers, Power Factors</i>	0.5%
	<i>Energies</i>	1%
<b>COMMUNICATION</b>	<i>Connection/Protocol</i>	RS-485: Modbus RTU
	<i>RS-485 Cabling</i>	Shielded cables, with at least two twisted pairs (2x24 AWG), minimum section of 0.25mm <sup>2</sup> and characteristic impedance of 120ohms
	<i>Transmission Speed</i>	9600bps
	<i>Data Format</i>	8N1, 8N2, 8E1, 8O1 (configurable)
	<i>Addressing</i>	1 to 247 (configurable)
<b>DISPLAY</b>	<i>LCD (blue)</i>	1 line x 6 columns, with backlight
<b>ENCLOSURE</b>	<i>Material</i>	Thermoplastic
	<i>Mass</i>	0.2Kg
	<i>Protection Degree</i>	IP-51 (case) and IP-20 (electrical connections)
<b>ENVIRONMENTAL CONDITIONS</b>	<i>Temperature</i>	Operation: 0 to 60°C (32 to 140°F)
	<i>Relative Air Humidity</i>	Maximum of 85% (without condensation)
	<b>STANDARDS</b>	<i>Electrical Parameters</i>

## DIMENSIONS

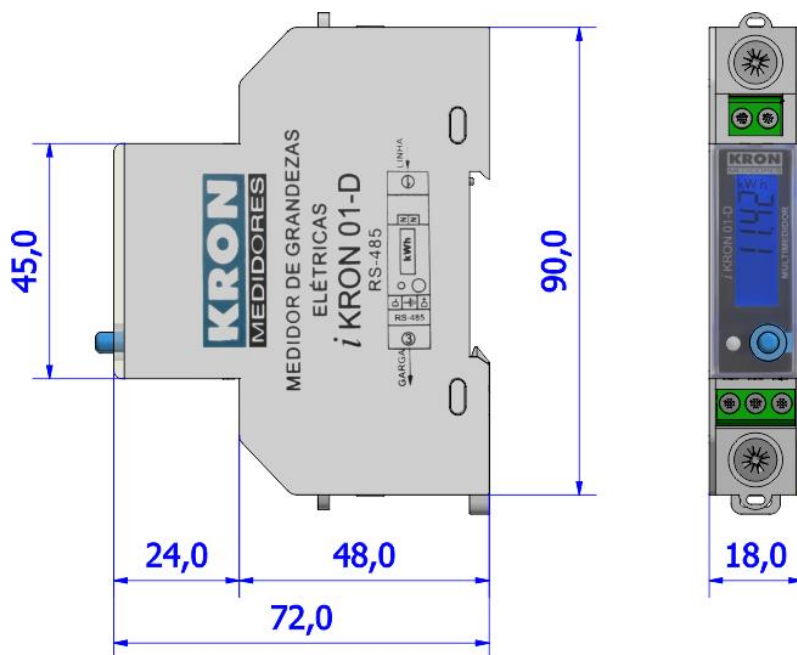

### How to Specify:

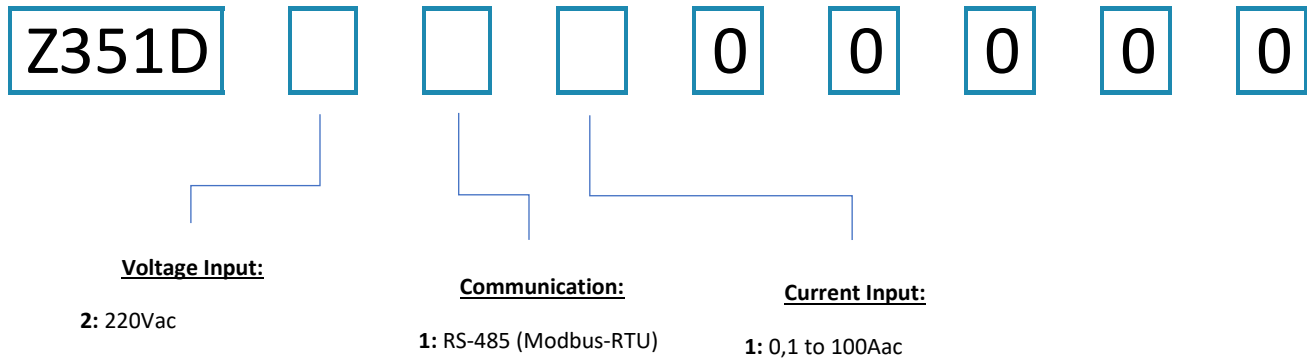

**Standard Model:** (Example)

**Z351D 2 1 1 0 0 0 0 0**

iKron 01-D {220Vac} {RS-485(Modbus-RTU)} {0,1 to 100Aac }

©2021 Kron Instrumentos Ltda - The information contained in this technical sheet is subject to changes without previous notice.  
For correct utilization of the product, the User Manual must be consulted before its installation or operation.  
Some items presented here may be optional, being necessary the correct product specification by their code.

**Kron Instrumentos Elétricos Ltda.**

Rua Alexandre de Gusmão, 278 - São Paulo, SP | Brasil

Phone: 55 (11) 5525-2000 | [www.kron.com.br](http://www.kron.com.br) | [suporte@kron.com.br](mailto:suporte@kron.com.br) | [vendas@kron.com.br](mailto:vendas@kron.com.br)